



产品编号: CGD0000020
日期: 2018/01/24
版本号: V1.0

>>> 产品参数 Specification <<<

Page

1/2

MIFARE 1K S50(7B UID) EV1 PRINT PVC CARD

尺寸 Card Size

85.5X54mm

天线尺寸/材质 Antenna Size / Material

71X40mm

PVC

厚度 Thickness

0.76-0.84mm

芯片 Chip

MIFARE 1K S50(7B UID) EV1

频段/协议 Resonance Frequency / Protocol

14.5-15.5Mhz

ISO14443A

内存

Memory

UID: 7B UID with optional random ID

USER: 1024byte

Origination: 16 sectors a 64 byte

芯片使用寿命 IC Life

10万次擦写, 数据保存10年

100,000 Programming cycles, 10years data retention


读距/读卡器 Reading Distance / Reference Reader

4 – 5 cm


ACS ACR122U-A9



实物图 (Product Image)

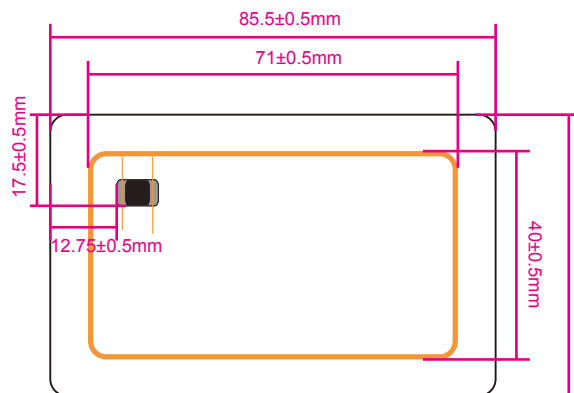

天线 (Antenna)

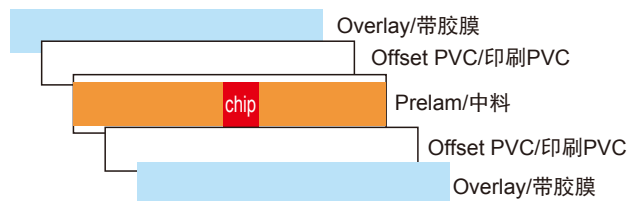

结构图(Structure)

用途 Application

企业一卡通、公交卡、高速公路收费卡、停车场、
小区管理系统、会员积分、水表预付费、酒店房卡等。
Business card/Bus Card/Freeway toll card/
Parking lot card/Community Management System/
Vip card/Hotel room card etc.

产品编号: CCD0000020
 日期: 2018/01/24
 版本号: V1.0

>>> 产品参数 Specification <<<

Page

2/2

特殊工艺 Features (Option)

流水号打码 / UID打码 / 二维码 / 加密 / 磁条 等
 Serial NO. / UID / Barcode / Encoding / Mag strip , etc.

包装 Packing



数量 / 盒
 Qty / Box
 200 pcs

数量 / 箱
 Qty / Carton
 1000 pcs
 2000 pcs
 3000 pcs

箱子尺寸
 Carton Dimension
 31X22X12 cm
 32X23.5X21 cm
 23X19X51 cm

操作/储存 温度 Temperature / Humidity

操作温度(Operating Temperature/Humidity): [-15°C to +65°C] 20% to 90% RH Non-condensing;
 适用温度(Storage Temperature/Humidity): [-25°C to +50°C] 20% to 90% RH Non-condensing;

保质期 Shelf Life

使用密封包装、在+23°C±5°C / 50%±10%RH条件下1年。
 From the date of manufacture, 1 year in vacuumed bag at +23°C±5°C / 50%±10%RH)。